



AERODROME GROUND MOVEMENT AND
AIRCRAFT PARKING/DOCKING CHART - ICAO

APRON 119.000
RADAR 124.200

PEVEK, RUSSIA

PEVEK

PZ - 90.11 coordinates

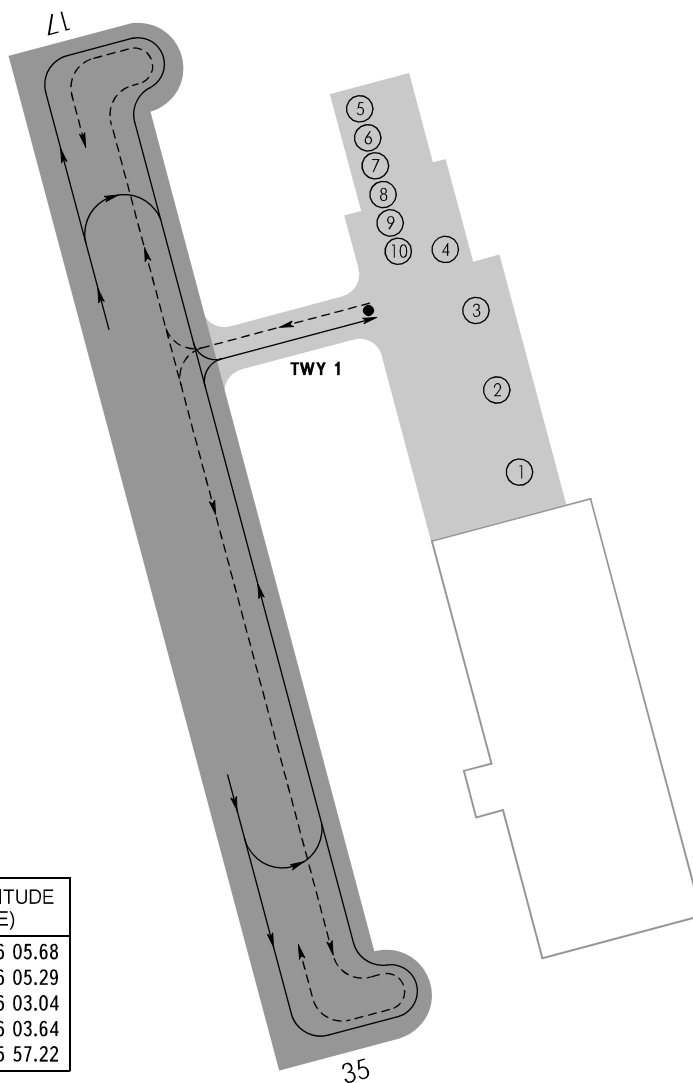

STANDS	LATITUDE (N)	LONGITUDE (E)
1	69 47 14.40	170 36 05.68
2	69 47 16.76	170 36 05.29
3	69 47 19.03	170 36 03.04
4	69 47 20.64	170 36 03.64
10	69 47 21.01	170 35 57.22

Not to scale

APRON:

Surface: - Concrete

Stands 1-3

Strength: - PCN 18/R/A/X/T (01 JUN-15 OCT)
PCN 33/R/A/X/T (16 OCT-31 MAY)

Stands 4-10

Strength: - PCN 10/R/A/X/T (01 JUN-15 OCT)
PCN 15/R/A/X/T (16 OCT-31 MAY)

TAXIWAYS:

Width: - 22.5m

Surface: - Concrete

Strength: - PCN 18/R/A/X/T (01 JUN-15 OCT)
PCN 33/R/A/X/T (16 OCT-31 MAY)

WARNING:

1. ACFT shall taxi via TWY 1 at speed not more than 30km/h.
2. ACFT with spacing between the outboard engines 30m or above shall taxi under inboard engines power.
3. After landing, ACFT with low-mounted engines shall shut down engines at junction of TWY 1 and the apron and then proceed under tow to the stand. Before departure, towing is carried out from the stand to engines start-up position.
4. De/anti-icing treatment of B757, B767 ACFT types is not provided.

ACFT types:

An-12, An-140 and modifications, Il-18, Il-62, Il-76, Il-76T/TD, Tu-134, Tu-154, Tu-204/-100/204C, Tu-214, A-320/320neo, ATR-72, B737-200/700/800, B757-200 and modifications, B767-200/300, DCH-8-Q 300, DCH-8-Q 400, S5J-100

An-24, An-26, An-30, An-72, An-74, An-148, Yak-40, Yak-42, DCH-6 and modifications, Falcon 900 and modifications

An-2, An-3, An-28, An-38, CAT A ACFT, HEL of all types

STANDS:

1, 2

3, 4

5-10